
QUINCY HOUSING AUTHORITY

ILLINOIS

540 HARRISON STREET QUINCY, ADAMS COUNTY, ILLINOIS

JERRY GILLE **EXECUTIVE DIRECTOR**

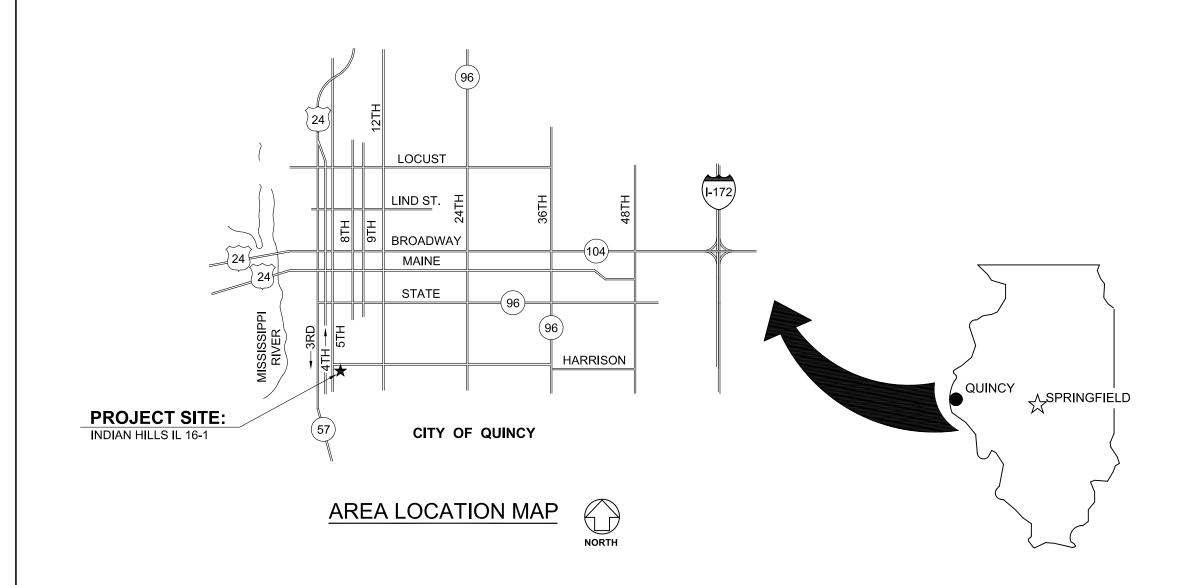

GENERAL NOTES

- 1. CONTRACTOR TO VERIFY ALL DIMENSIONS.
- 2. ANY DISCREPANCIES BETWEEN STATED AND EXISTING CONDITIONS SHALL BE REPORTED IMMEDIATELY TO THE
- 3. DISCREPANCIES OR CONFLICTS BETWEEN SPECIFICATIONS AND DRAWINGS SHALL BE MADE KNOWN TO THE ARCHITECT FOR
- 4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING THOSE AREAS TO REMAIN UNDISTURBED DURING
- FOR SAFETY MEASURES. THE CONTRACTOR IS ALSO SOLELY RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, AND TECHNIQUES REGARDING EXECUTION OF THE WORK.
- CODES AND RECEIVE LOCAL AND STATE APPROVAL WHERE NECESSARY PRIOR TO CONSTRUCTION.
- 7. THE CONTRACTOR SHALL GIVE ALL NECESSARY NOTICES AND OBTAIN ALL PERMITS AND PAY ALL LEGAL FEES. HE SHALL ALSO COMPLY WITH ALL CITY, COUNTY, AND STATE BUILDING LAWS, ORDINANCES, OR REGULATIONS.
- 8. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE DAMAGE OR LOSS OF ANY REFERENCE POINTS, MONUMENTS, HUBS AND STAKED LOT CORNERS DURING THE CONSTRUCTION OF HIS WORK, AND SHALL BEAR THE COST OF REPLACING SAME.
- 9. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGE DONE TO THE PREMISES OR ADJACENT PREMISES, OR INJURIES TO THE PUBLIC DURING THE CONSTRUCTION OF THE WORK, CAUSED BY HIMSELF, HIS SUBCONTRACTOR, OR THE CARELESSNESS OF ANY OF HIS EMPLOYEES.
- 10. THE CONTRACTOR MUST UNDERSTAND THAT THE WORK IS ENTIRELY AT HIS RISK UNTIL SAME IS ACCEPTED, AND HE WILL BE HELD RESPONSIBLE FOR ITS SAFETY.
- 11. THE CONTRACTOR SHALL FURNISH AND INSTALL ALL NECESSARY TEMPORARY WORKS FOR THE PROTECTION OF THE WORK, INCLUDING BARRICADES, WARNING SIGNS, LIGHTS, ETC.
- 12. SITE LAYOUT IS TO BE AS PER ARCHITECTURAL DRAWINGS AND SPECIFICATIONS PREPARED BY ARCHITECT.
- 13. THE CONTRACTOR SHALL PROVIDE THE ARCHITECT WITH ONE SET OF PRINTS MARKED WITH ANY CHANGES FROM ORIGINAL CONTRACT DOCUMENTS.
- 14. ALL EXISTING CIRCUIT CONDUCTORS AND RACEWAYS IN BUILDING UNITS TO REMAIN UNLESS NOTED OTHERWISE.

A.D.A. COMPLIANCE

THIS PROJECT SHALL BE IN COMPLIANCE WITH GUIDELINES OF THE AMERICANS WITH DISABILITIES ACT (A.D.A.)

AMERICANS WITH DISABILITIES ACT (A.D.A.)

ARCHITECHNICS, INC., TO THE BEST OF ITS ABILITY, HAS EXERCISED PROFESSIONAL EFFORTS TO INTERPRET THE INTENT OF THE "AMERICANS WITH DISABILITIES ACT", AND OTHER APPLICABLE FEDERAL, STATE AND LOCAL CODES AND REQUIREMENTS. ARCHITECHNICS, INC. CANNOT GUARANTEE TOTAL COMPLIANCE WITH ANY WORK DIRECTLY RELATED TO THE A.D.A., WHEN THE OWNER PERFORMS AND/OR AUTHORIZES WORK USING THESE DOCUMENTS AND/OR DRAWINGS.

INDEX OF DRAWINGS

COVER SHEET

SITE PLAN - INDIAN HILLS (IL 16-1)

DOOR DETAILS

LICENSE EXPIRES: 11/30/19

CONSTRUCTION DOCUMENT

PHASE **ISSUED FOR** CONSTRUCTION ISSUE DATE: 4/5/2019 REVISIONS

PROJECT NUMBER: 5673A

COVER SHEET

DWG. NO.

ABBREVIATIONS

SHEET

SIMILAR SOLID CORE

SPECIFICATION

STANDARD

STORM SEWER

TACK BOARD

GLASS

TERRAZZO

TERRAZZO TILE

THRESHOLD

TRANSITION

TYPICAL UNDERWRITERS LABORATORIES

TOILET PAPER TONGUE AND GROOVE

THICK/THICKNESS

TOP AND BOTTOM

UNLESS NOTED

VAPOR BARRIER

VINYL COMPOSITION

VITRIFIED CLAY PIPE

WELDED WIRE FABRIC

UTILITY POLE

VERTICAL

VESTIBULE

VINYL WALL COVERING

WINDOW

WIRE GLASS WITH OUT WOOD TREADS TYPICAL

UNDERWRITERS

TAPE AND SAND

TEMPERED GLASS TEMPERED REFLECTIVE

STORAGE

STEEL

STAIN AND VARNISH


STRUCTURAL GLAZED

SUSPENDED ACOUSTICAL

TELECOMMUNICATIONS DEVICE FOR DEAF

STAINLESS STEEL

ABV A.F.F. ADD'N.	ABOVE ABOVE FINISHED FLOOR ADDITION	DWG D.F. EA.	DRAWING DRINKING FOUNTAIN EACH	M.A.U. M.H. MFGR.	MAKEUP AIR UNIT MANHOLE MANUFACTURER	SECT. SHT. SIM.
A.C.	AIR CONDITIONING	E.W.	EACH WAY	M.T.	MARBLE TILE	S.C.
A.H.U.	AIR HANDLING UNIT	E.M.R.	ELASTOMERIC MEMBRANE	MK.	MARK	SPEC. S.& V.
ALT	ALTERNATE	F. F.	ROOFING	M.O.	MASONRY OPENING	S.& V. S.S.
ALUM	ALUMINUM	ELEC. E.P.	ELECTRIC ELECTRIC PANELBOARD	MATL. MECH.	MATERIAL MECHANICAL	STD.
A.D.A.	AMERICANS WITH DISABILITIES ACT	E.P.	ELECTRIC PANELBOARD ELEVATION	MET.	METAL	STL.
ANCC	ANCHORS	ELEV.	ELEVATION	MIN.	MINIMUM	STOR.
ANCS. AUTO.	AUTOMATIC	EXH.	EXHAUST	MISC.	MISCELLANEOUS	ST. S.
BM.	BEAM	E.F.	EXHAUST FAN	M.R.	MOISTURE RESISTANT	S.G.T.
BR'G.	BEARING	EXIST	EXISTING	MTD.	MOUNTED	
BITUM.	BITUMINOUS	E. J.	EXPANSION JOINT	N.D.	NAPKIN DISPENSER	S.A.P.
BLK'G.	BLOCKING	EXT	EXTERIOR	N.I.C.	NOT IN CONTRACT	T.B.
BLDG	BUILDING	E.I.F.S.	EXTERIOR INSULATION FINISH SYSTEM	NOM. NO.	NOMINAL NUMBER	T. & S.
BD.	BOARD	F.W.C.	FABRIC WALL COVERING	OFC.	OFFICE	T.D.D.
BTM.	BOTTOM	F.V.	FIELD VERIFY	0.C	ON CENTER	
B.P. BLDG	BRICK PAVERS BUILDING	FIN.	FINISH	OPG.	OPENING	T.G.
BUR	BUILT-UP ROOF	F.E.C.	FIRE EXTINGUISHER	OPP. HND.	OPPOSITE HAND	T.R.G.
CA.	CARPET		CABINET	OH.	OVERHEAD	
C.I.	CAST IRON	FIX.	FIXTURE	PT.	PAINT	TZ.
CAT	CATALOG	FL. F.D.	FLOOR FLOOR DRAIN	PR.	PAIR	T.T.
CLG.	CEILING	F.D. FLOUR.	FLUORESCENT	PARTN. PERF.	PARTITION PERFORATED	THK. T'HOLD
C.T.	CERAMIC TILE	FTG.	FOOTING	PERF.	PRESSURE DROP	T.P.
C.W.B.	CERAMIC WALL BASE	FND.	FOUNDATION	PLAS.	PLASTIC	T. & G.
C.B. CLOS.	CHALK BOARD CLOSET	G.P.M.	GALLONS PER MINUTE	P.S.	PLUMBING STACK	T. & B.
C.O.	CLEAN OUT	GALV	GALVANIZED	PV	PLUMBING VENT	TRANS.
CO.	COMPANY	GA.	GAUGE	PLYWD.	PLYWOOD	T.
COMP	COMPOSITION	G.W.T.	GLAZED WALL TILE	P.V.C.	POLYVINYL CHLORIDE	TYP.
CONC	CONCRETE	G.B.	GRAB BAR	P.S.F.	POUNDS PER SQUARE	U.L.
C.M.U.	CONCRETE MASONRY	G.F.B. GYP. BD.	GROUND FACE BRICK	DDEEN	FOOT	U.N.O.
00115	UNIT	H.D.	GYPSUM WALLBOARD HAIR/HAND DRYER	PREFIN.	PREFINISHED PROJECT MANUAL	U.N.O.
COND CONN.	CONDENSATION CONNECTION	HC	HANDICAPPED	QTY.	QUANTITY	U.P.
CONST	CONSTRUCTION	HR.	HANDRAIL	Q.T.	QUARRY TILE	V.P.
C J	CONSTRUCTION JOINT	HDWE.	HARDWARE	RAD.	RADIUS	VERT.
CONT	CONTINUOUS	H.V.A.C.	HEATING, VENTILATING,	RECEP.	RECEPTACLE	VEST.
CONTR.	CONTRACTOR		& AIR CONDITIONING	REF.	REFERENCE	V.C.T.
COR'D	CORRUGATED	HT.	HEIGHT	R.A.	RETURN AIR	
CORR.	CORRIDOR	H.C. H.M.	HOLLOW CORE	R.H.	RIGHT HAND	V.W.C.
CNTR.	COUNTER	HORIZ.	HOLLOW METAL HORIZONTAL	R. R.D.	RISERS ROOF DRAIN	V.C.P.
C.R.	CRUSHED ROCK	INC.	INCORPORATED	R.B.	RUBBER BASE	w.c.
C.F.M.	CUBIC FEET PER MINUTE	INSUL.	INSULATION	R.C.B.	RUBBER COVE BASE	W.W.F.
DEMO	DEMOLITION	INSUL.G.	INSULATED GLASS	REQD.	REQUIRED	W.
DET	DETAIL	JAN.	JANITOR	R.O.W.	RIGHT OF WAY	WDW.
DIA	DIAMETER	JT.	JOINT	RM.	ROOM	W.G.
DIM.	DIMENSION	J.F.	JOINT FILLER JOIST	R.I.	ROUGH IN	W/
DISP.	DISPENSER	JST. J.B.	JUNCTION BOX	R.O.	ROUGH OPENING	W/O
DIV.	DIVISION	LAM.	LAMINATE	R.S.T.	RUBBER STAIR TREAD	WD. T.
DR.	DOOR	LAV.	LAVATORY	R.T. SAN.	RUBBER TILE SANITARY (SEWER)	TYP
DBL. D.S.	DOUBLE DOWNSPOUT	L.H.	LEFT HAND	SCHED.	SCHEDULE	U.L.
D.O.	2011101 001	LG.	LONG		· · · · · · - · · · · · · ·	
		1		1		İ

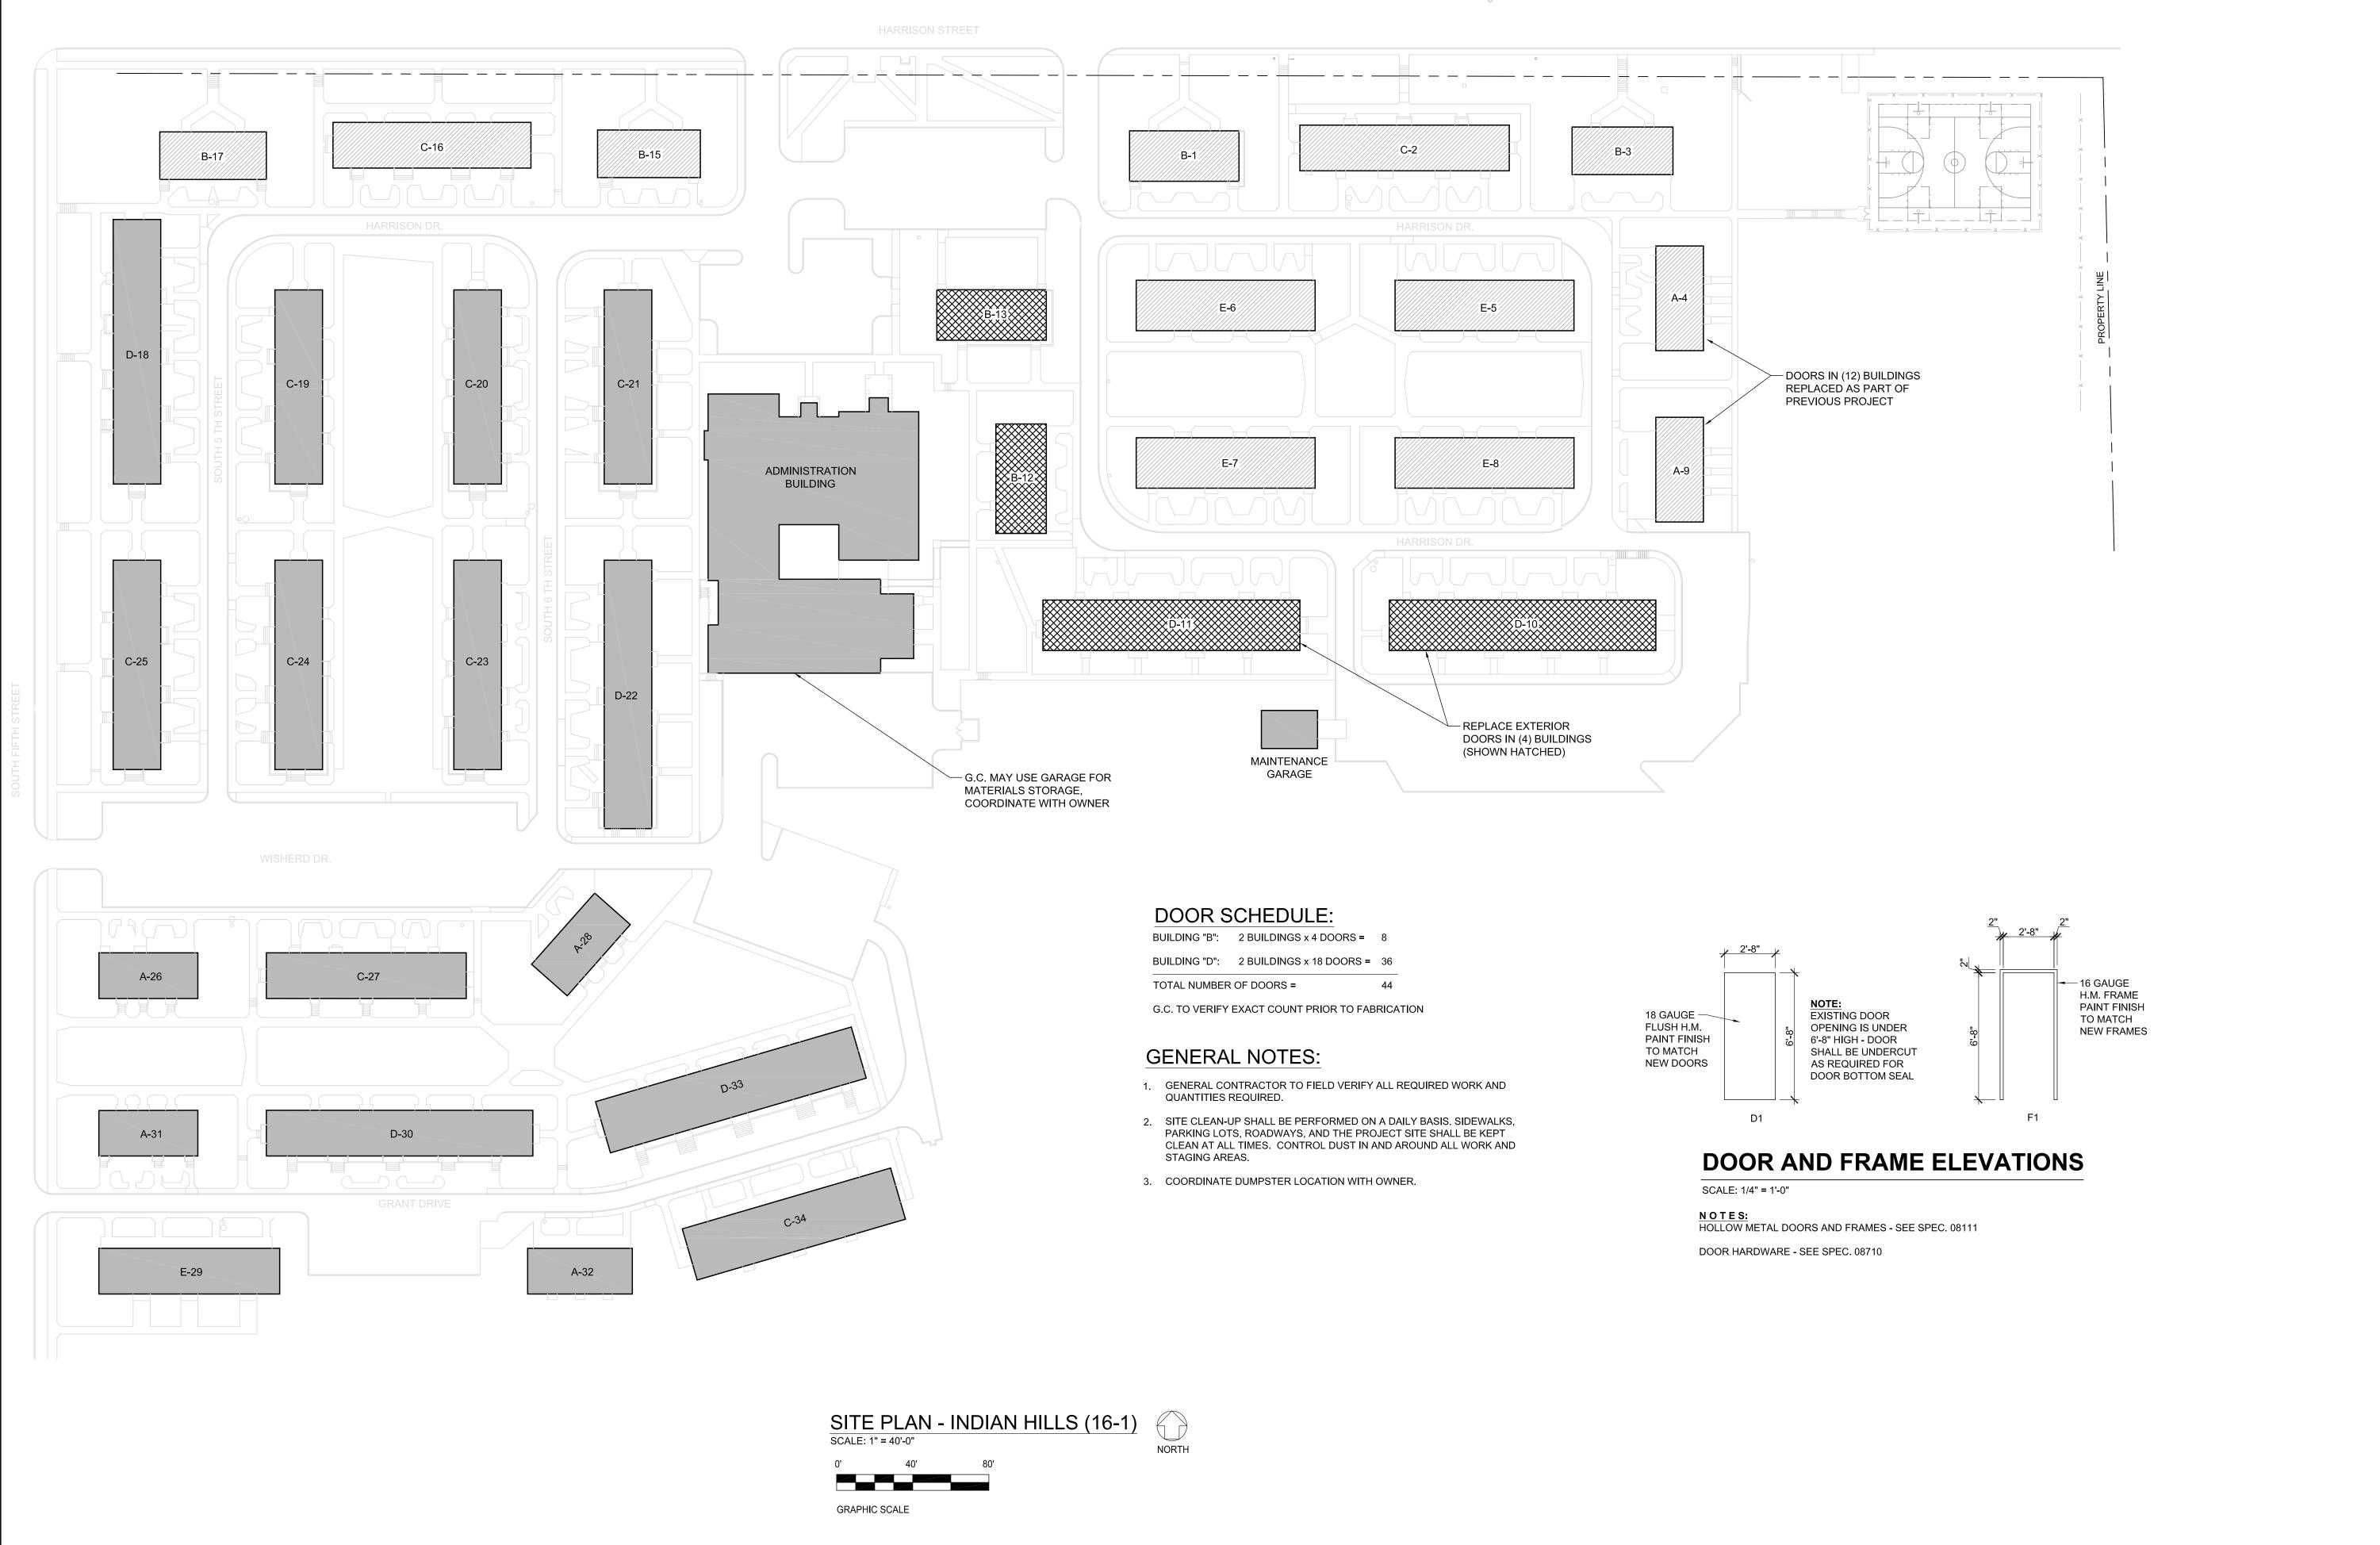

CURRENT DATE: 4/5/2019



LICENSE EXPIRES: 11/30/19

AUTHORITY
INOIS 62301


CONSTRUCTION **DOCUMENT** PHASE

ISSUED FOR CONSTRUCTION ISSUE DATE: 4/5/2019 REVISIONS

PROJECT NUMBER: 5673A

SITE PLAN

DWG. NO. A101

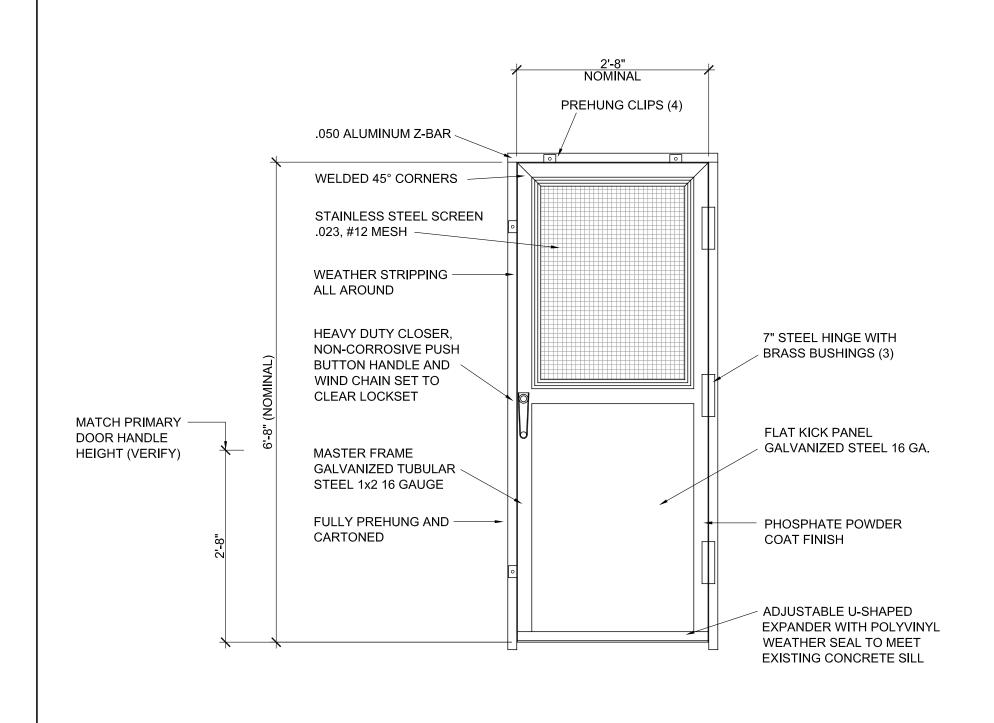

SEE DETAIL A2-5


OPENING DATE


STORM DOOR DETAIL A2-1
SCALE: 3/4"=1'-0"

DOOR DIMENSIONS AND PANNING ARE THE RESPONSIBILITY OF THE GENERAL CONTRACTOR AND DOOR MANUFACTURER -

STORM DOOR CONSTRUCTION TO BE MARATHON STEEL DOOR MODEL 4800 AS MANUFACTURED BY ALL-WEATHER MANUFACTURING OR EQUIVALENT APPROVED BY ARCHITECT (7) DAYS PRIOR TO BID

EXISTING BRICK VENEER TO REMAIN EXISTING WOOD FURRING TO EXISTING CONCRETE -REMAIN CANOPY TO REMAIN - EXISTING PLASTER FINISH TO REMAIN, PATCH AND REPAIR AS REQUIRED EXISTING DOOR CASING TO BE REMOVED NEW 2"x8 1/4" H.M. FRAME, CAULK AND SEAL PAINT FINSH, ANCHOR TO EXISTING CONCRETE CANOPY AS REQUIRED EXISTING WOOD FRAME AND TRIM TO BE REMOVED (SHOWN DASHED) – NEW H.M. DOOR, PAINT FINSH, SEE SCHEDULE

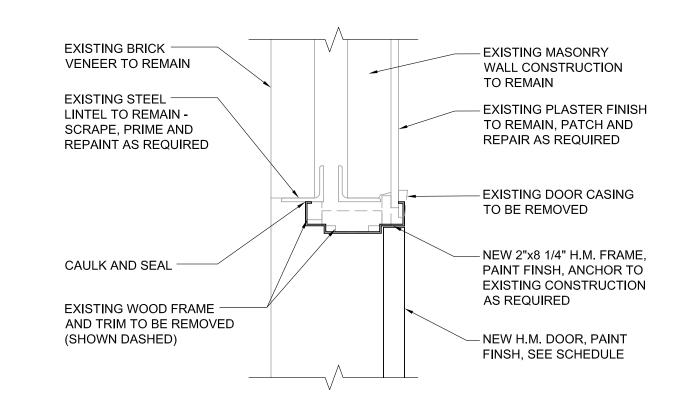

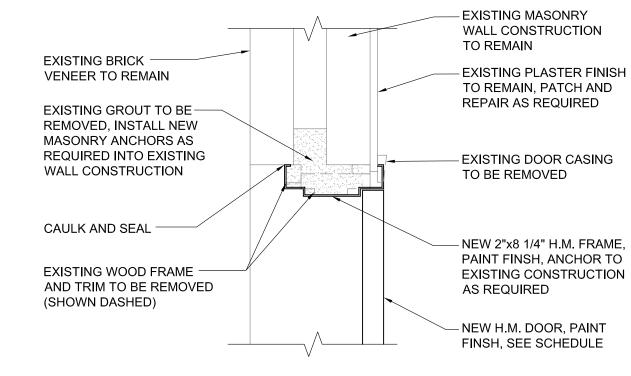


JAMB DETAIL A2-4 SCALE: 1 1/2"=1'-0"

HEAD DETAIL A2-2 SCALE: 1 1/2"=1'-0"

HEAD DETAIL A2-3 SCALE: 1 1/2"=1'-0"

EXISTING PLASTER WALL CONSTRUCTION, REPAIR AS REQUIRED, PAINT FINISH TO MATCH EXISTING EXISTING WOOD CASING TO BE REMOVED (SHOWN DASHED) NEW 2"x8 1/4" HOLLOW METAL DOOR FRAME EXPECTED LOCATION OF WOOD BLOCKING, PROVIDE NEW AS REQUIRED \

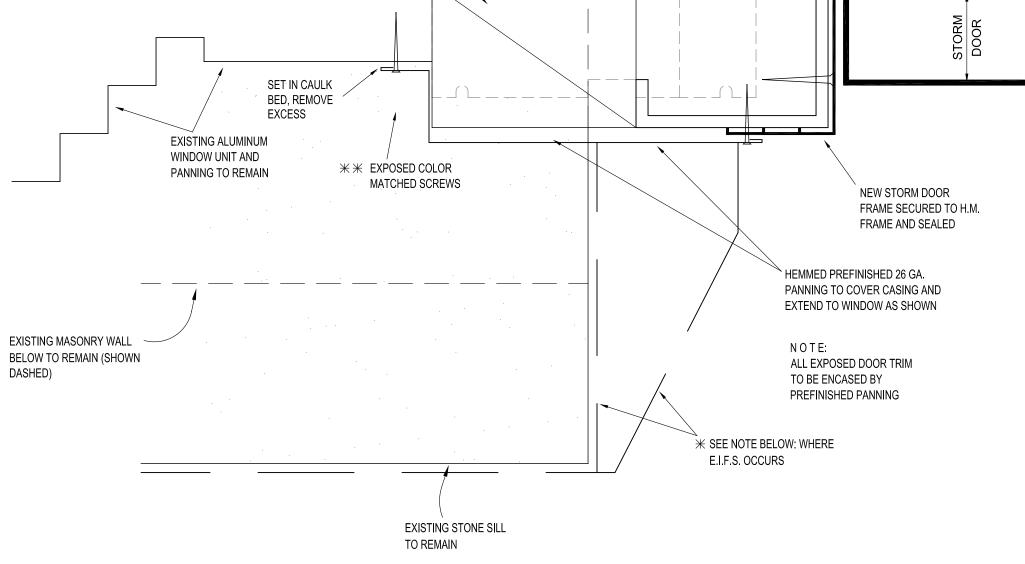

EXISTING DOOR JAMB SECTION A2-5

DETAIL NOTES:

1. PROVIDE SIMILAR FRAME AT HEAD, TRIMMED WITH PANNING TO COVER CASING. SEAL TO EXISTING LINTEL. VERIFY CONDITION AT PROJECT SITE.

NEW STORM DOOR HARDWARE TO BE SET AT EXISTING 32" KNOB HEIGHT, PREPARE H.M. FRAME AS REQUIRED

STORM DOOR, SEE

DETAIL A2-1

- ANCHOR NEW FRAMES TO EXISTING MASONRY ANCHORS INSTALL RAPID SET MORTAR WHERE ANCHORS ARE LOOSE. CONTRACTOR ALSO HAS OPTIONS TO (1) ANCHOR FRAME AT JAMB INTO EXISTING BRICK OR (2) GROUT NEW ANCHORS INTO HOLLOW BRICK CORES
- 3. * NOTE: REMOVE JAMB PORTION, REPAIR INSULATION, MESH, ETC. AND RESTORE EXTERIOR INSULATION AND FINISH SYSTEM (E.I.F.S.) AS REQUIRED WITH COLOR MATCHING LIKE MATERIALS, (4) HOUSING UNITS
- 4. ** NOTE: WHERE NEW STORM DOOR OCCURS ADJACENT TO BRICK MASONRY IN LIEU OF WINDOW PANNING: ABUT AND SEAL TO MASONRY.

CURRENT DATE: 4/5/2019

LICENSE EXPIRES: 11/30/19

CONSTRUCTION DOCUMENT PHASE

ISSUED FOR CONSTRUCTION SSUE DATE: **4/5/2019** REVISIONS

PROJECT NUMBER: 5673A

DOOR DETAILS

DWG. NO.