

ARCHITECHNICS, INC.
510 MAINE STREET
QUINCY, ILLINOIS 62301

PROJECT NO. : 5917D

ADDENDUM NO.: 3


ISSUED: 5/11/2020

Project: BROWN COUNTY HIGH SCHOOL SCIENCE ROOM RENOVATION
BROWN COUNTY COMMUNITY UNIT SCHOOL DISTRICT #1
503 NW CROSS STREET
MT. STERLING, IL 62353

This addendum becomes a part of the bidding and contract documents and modifies the drawings and specifications dated April 24, 2020.
Acknowledge receipt of this addendum by noting such on the Contractor's Proposal (Bid) Form.


FAILURE TO DO SO MAY SUBJECT BIDDER TO DISQUALIFICATION

ITEM	DESCRIPTION
<u>DRAWINGS</u>	
1.0 PE100	Replace Replace with attached sheet. Added data to casework. Added power and data to teaching desk.
Attachments: PE100, planholder's list.	

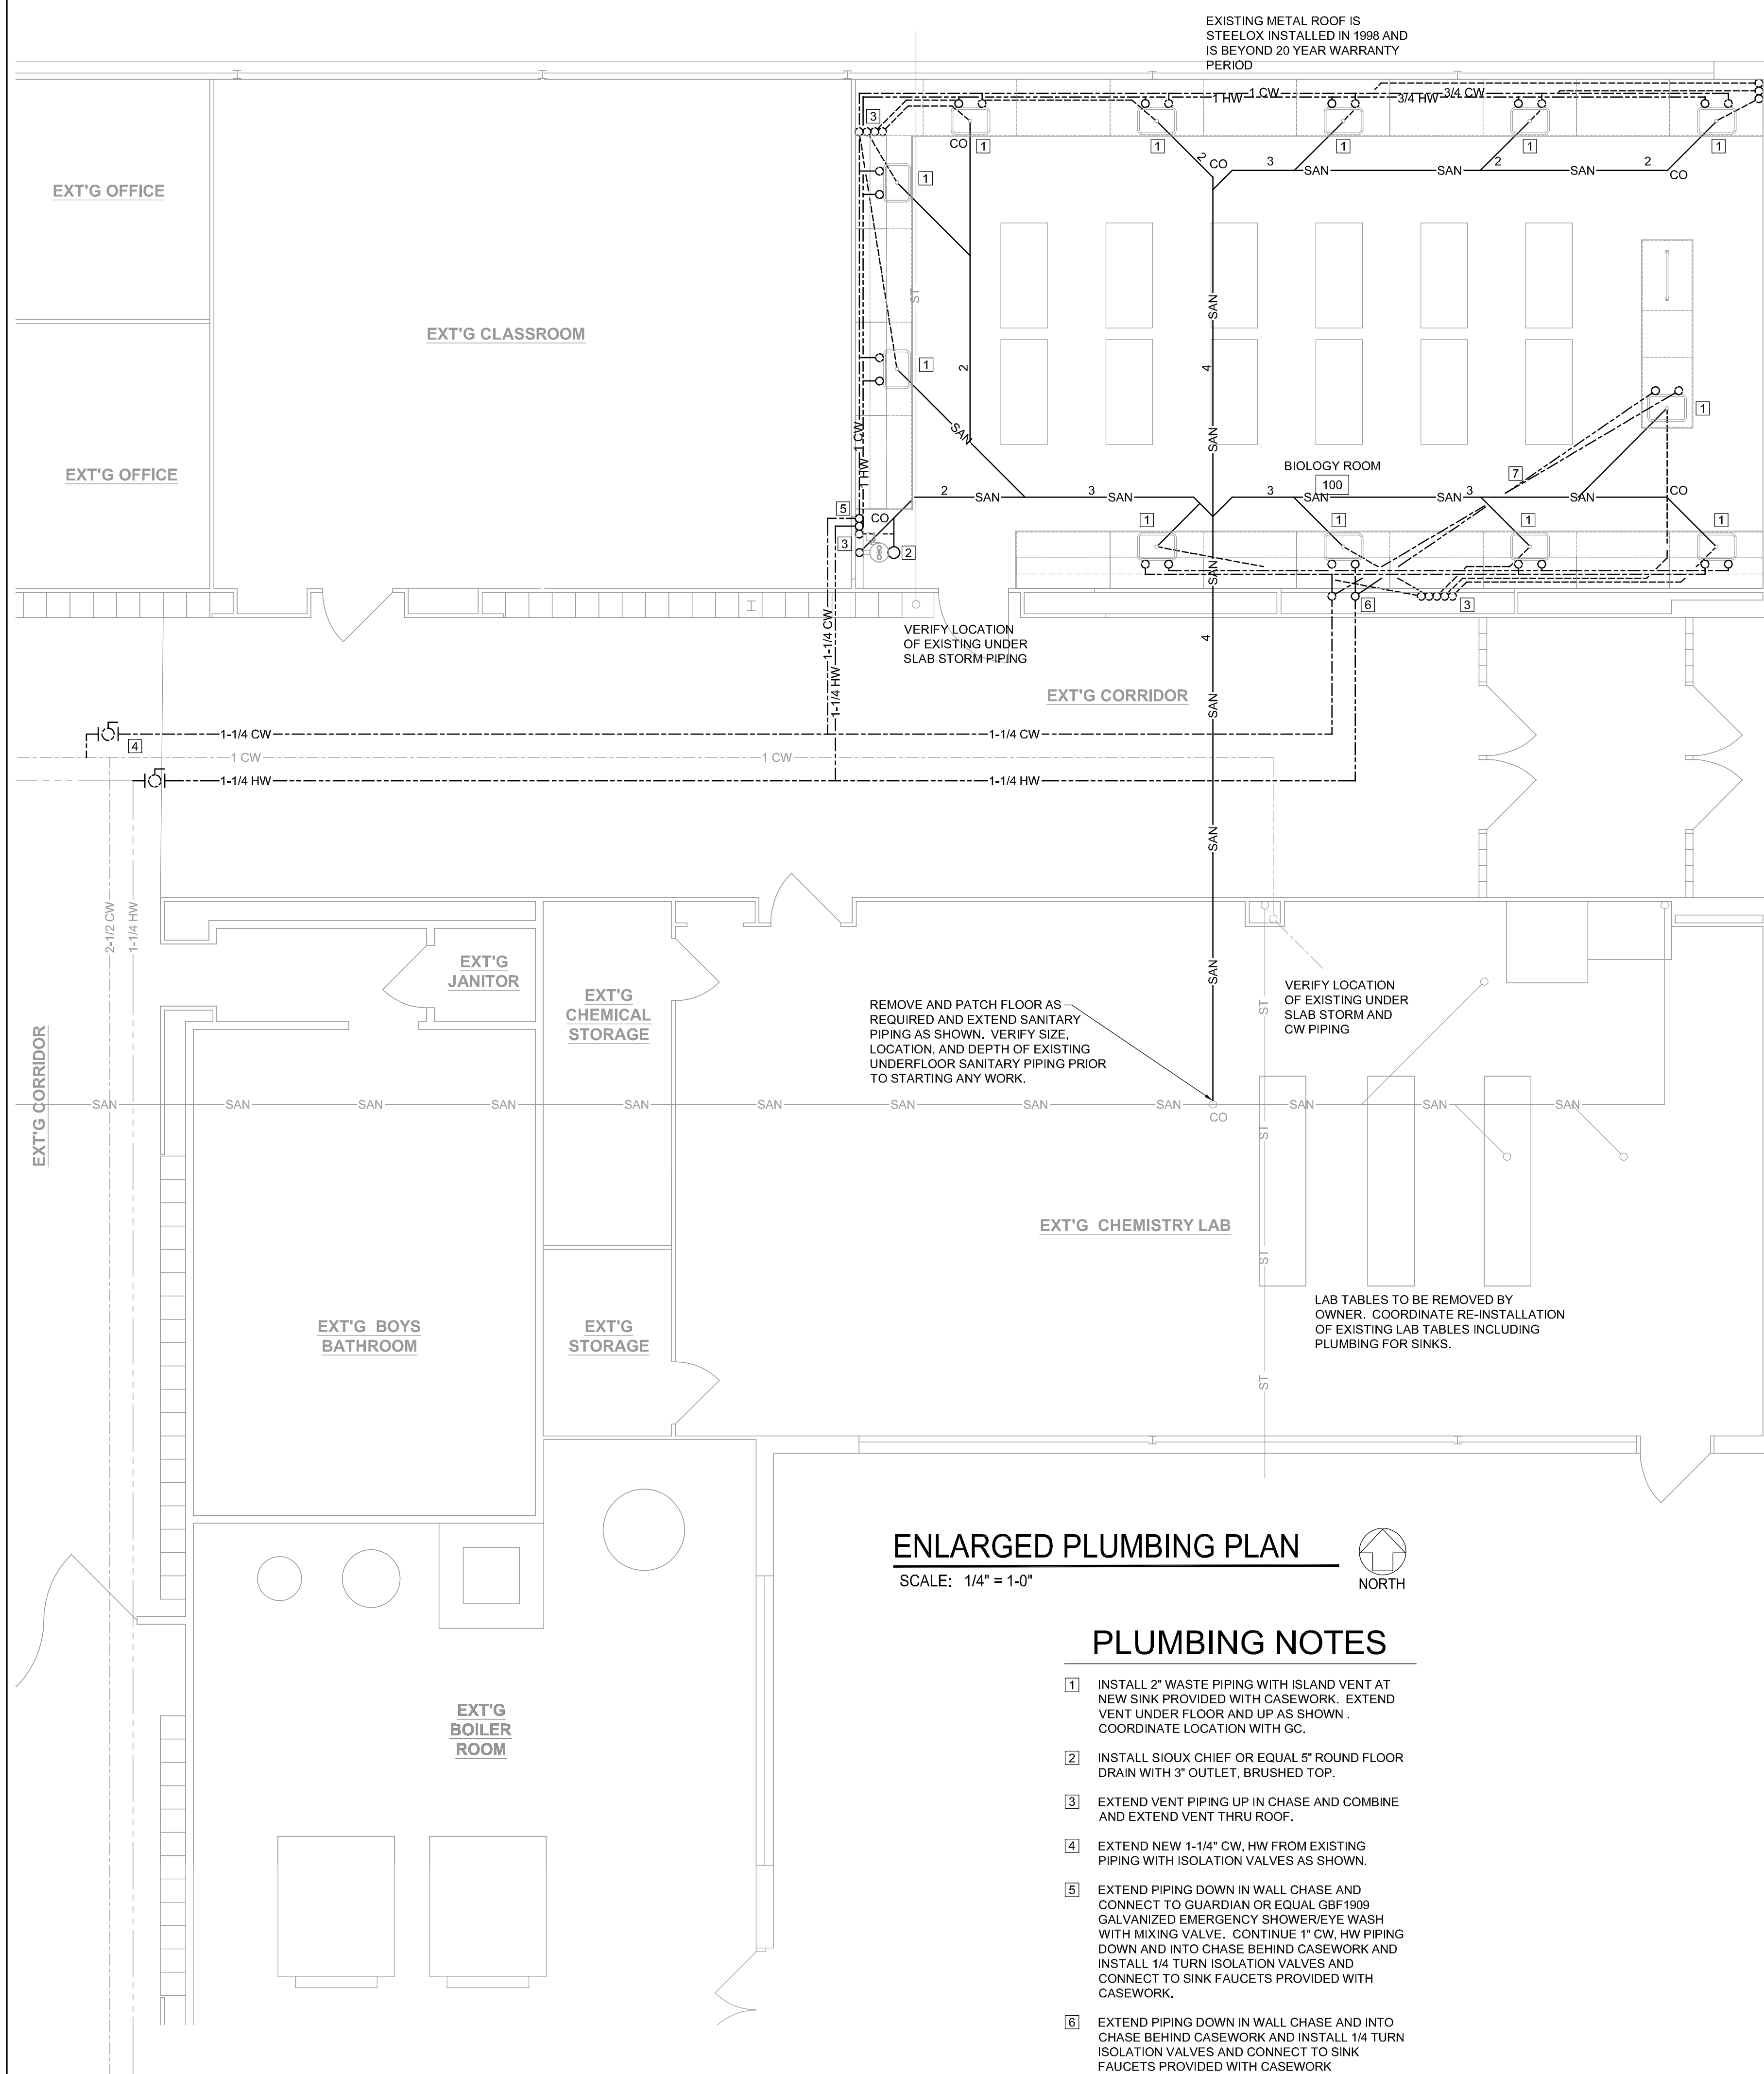

- ## PLUMBING NOTES

- 1 INSTALL 2" WASTE PIPING WITH ISLAND VENT AT NEW SINK PROVIDED WITH CASEWORK. EXTEND TO NEW JER FLOOR AND END AS SHOWN. COORDINATE LOCATION WITH OWNER.
- 2 INSTALL SLOUGH CHIEF OR EQUAL 6" ROUND FLOOR DRAIN WITH 3" OUTLET, BRUSHED TOP.
- 3 EXTEND VENT PIPING UP IN CHASE AND COMBINE AND EXTEND VENT TROUGH ROOF.
- 4 EXTEND NEW 1-1/4" CW, HW FROM EXISTING PIPING WITH ISOLATION VALVES AS SHOWN.
- 5 EXTEND PIPING DOWN IN WALL CHASE AND CONNECT TO GUARDIAN OR EQUAL G6B1999 1/2" ROUND IMMEDIATELY ABOVE SINK. WASH WITH MIXING VALVE. CONTINUE T/C HW, PIPING DOWN AND INTO CHASE BEHIND CASEWORK AND INST. 1/4" TURN VALVE. CONNECT TO SINK FAUCETS PROVIDED WITH CASEWORK.
- 6 EXTEND PIPING DOWN IN WALL CHASE AND INTO CHASE BEHIND CASEWORK. INSTALL 1/4" TURN ISOLATION VALVES AND CONNECT TO SINK FAUCETS PROVIDED WITH CASEWORK.
- 7 EXTEND 1/2" CW, HW PIPING UNDER FLOOR AND OVER TO SERVICE AREA. ENCASE PIPING AS REQUIRED NEAR SINK PARTIES WITH

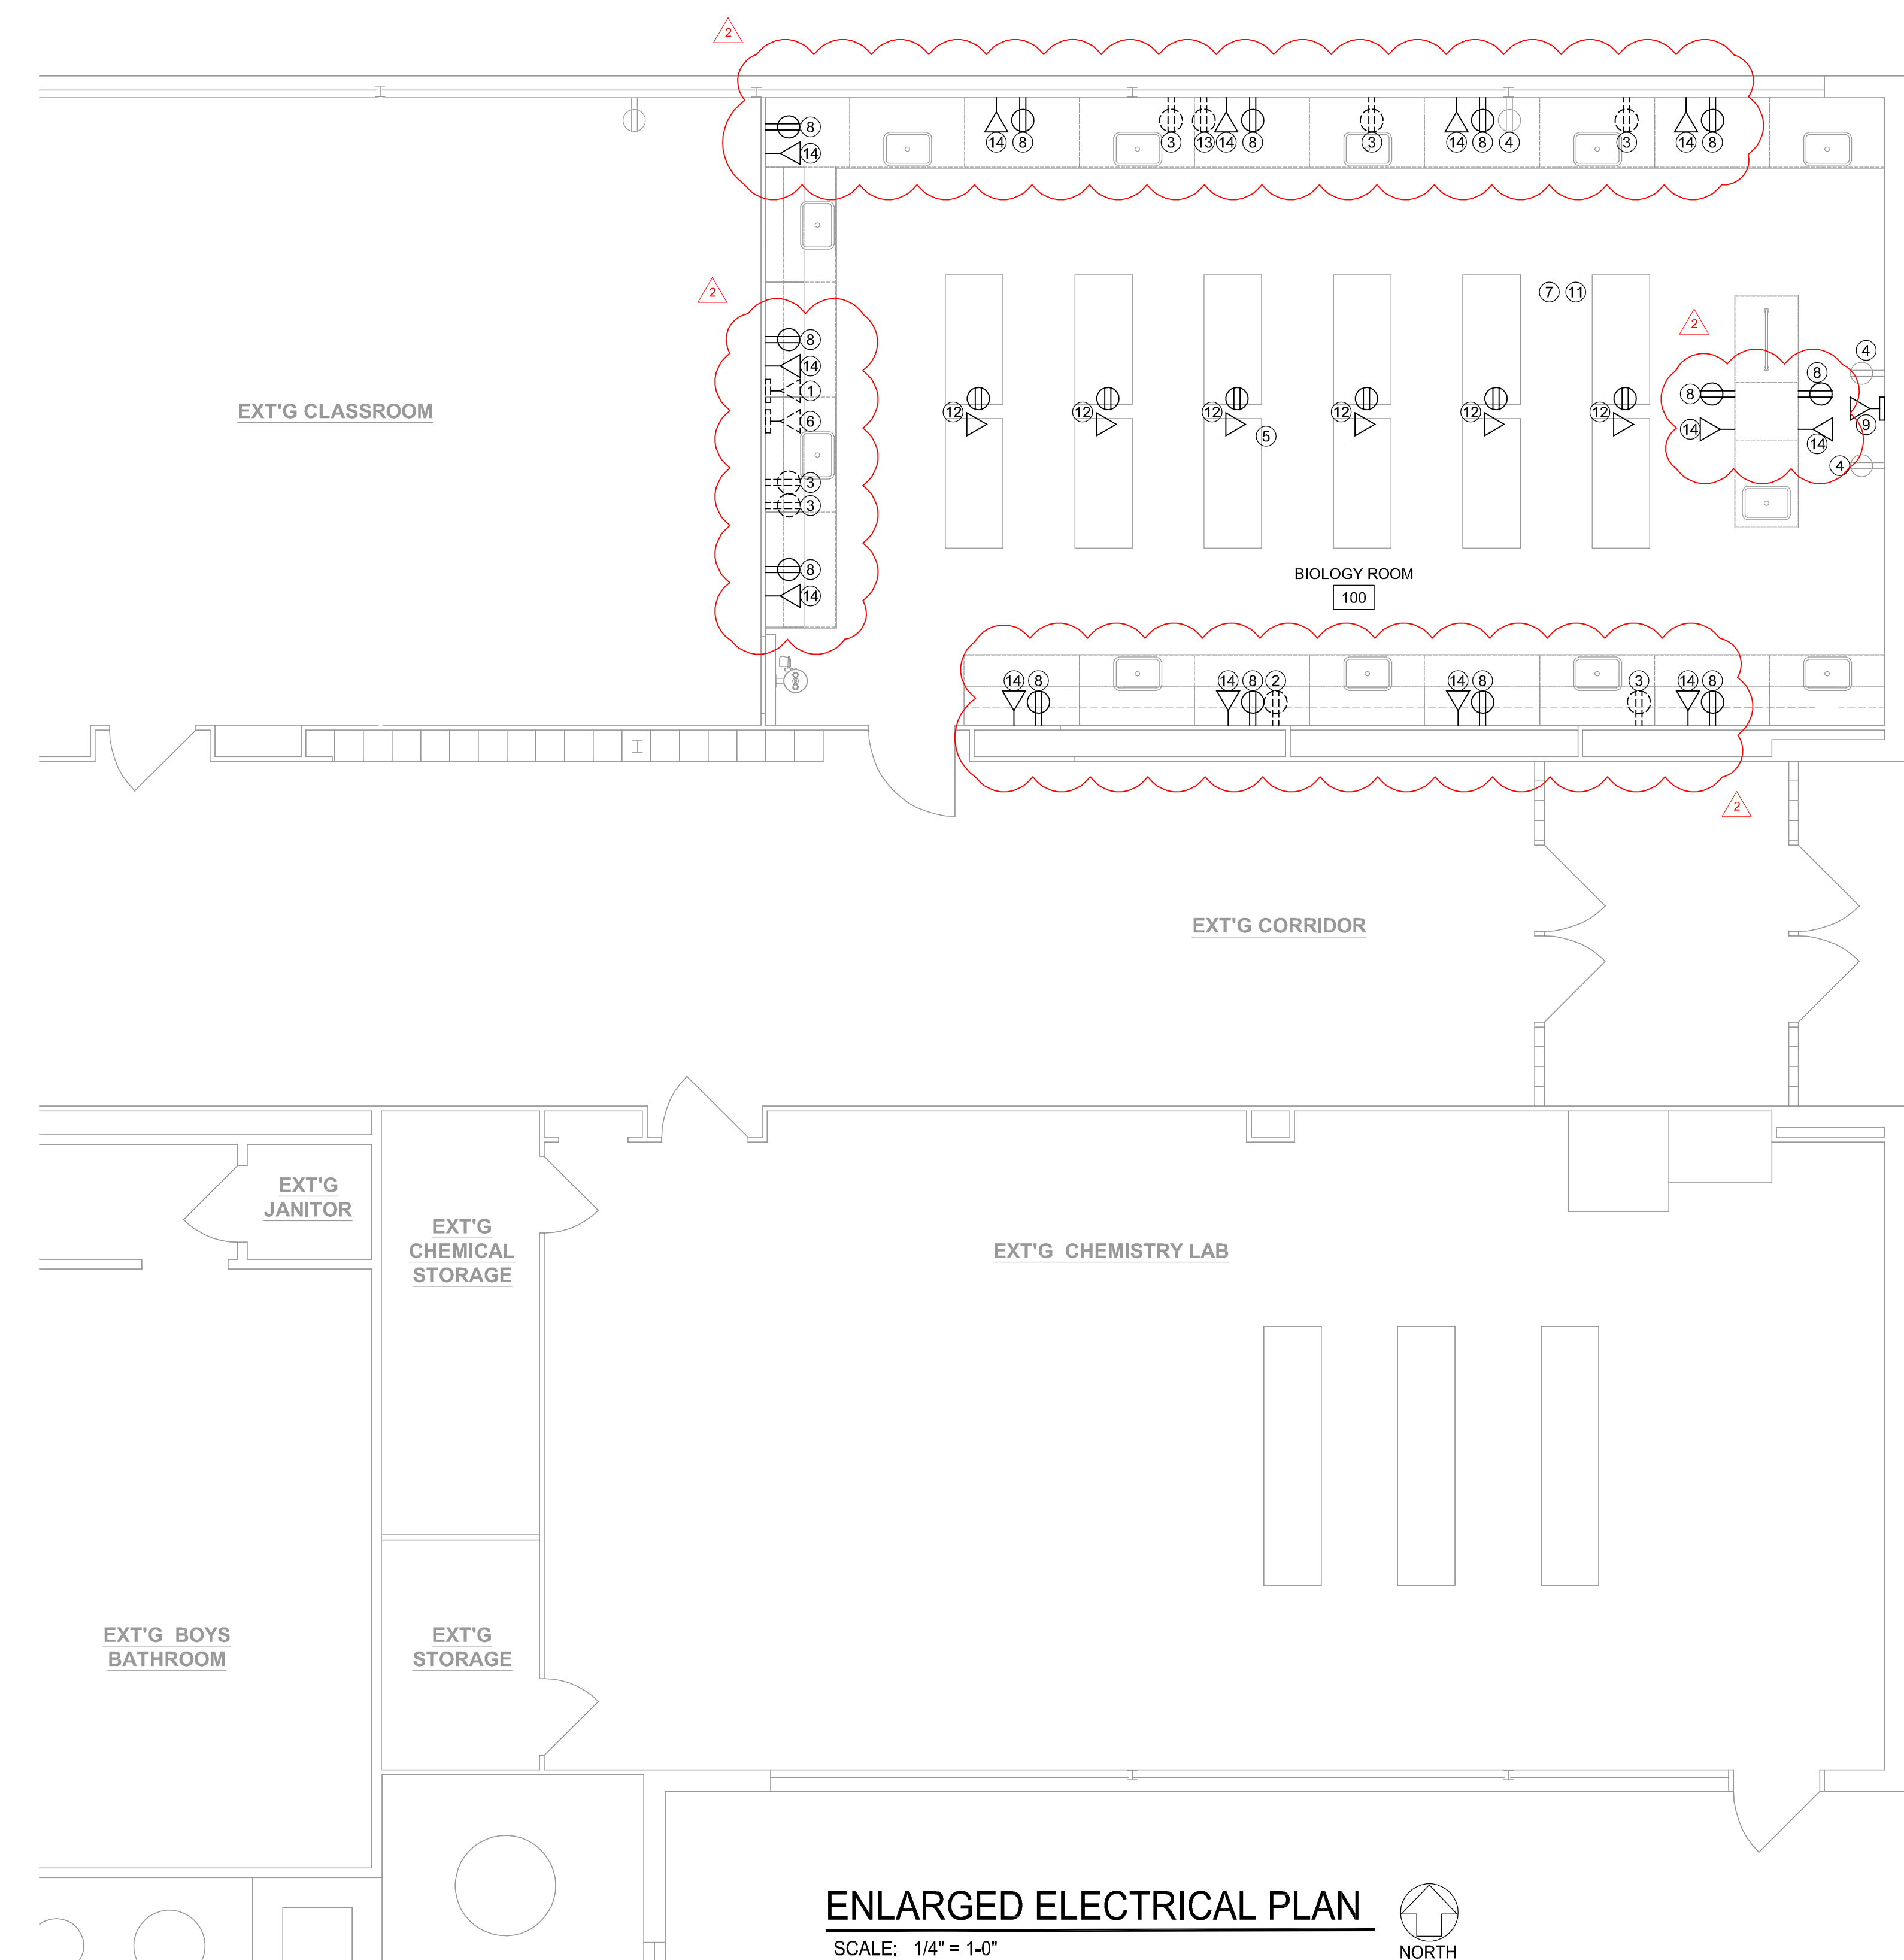

- ELECTRICAL NOTES

- ① COMPLETELY REMOVE EXISTING PHONE/DATA PORT AND CABLING.
- ② COMPLETELY REMOVE EXISTING RECEPTACLE. MODIFY CIRCUIT AS REQUIRED TO FEED NEW RECEPTABLES.
- ③ COMPLETELY REMOVE EXISTING RECEPTACLE AND EXPOSED CONDUIT/RACEWAY. MODIFY CIRCUIT AS REQUIRED TO FEED NEW RECEPTABLES.
- ④ EXISTING RECEPTACLE TO REMAIN
- ⑤ COMPLETELY REMOVE EXISTING ABANDONED PROJECTOR POWER AND AV CABLING
- ⑥ REMOVE EXISTING DATA PORT. DATA CABLING WILL BE RE-ROUTED BY OWNER
- ⑦ RELOCATE EXISTING FIRE ALARM DEVICE FROM EXISTING CEILING TILE TO NEW TILE BEING INSTALLED BY GC.
- ⑧ MODIFY EXISTING CIRCUITS AS REQUIRED OR EXTEND NEW TO SERVE NEW GFCI RECEPTABLES PROVIDED WITH CASEWORK. SEE DWG. A100 FOR CASEWORK CHASE DETAILS.
- ⑨ INSTALL NEW CONDUIT FROM ABOVE CEILING DOWN WALL WITH NEW DATA PORT. DATA CABLING BY OWNER.
- ⑩ INSTALL NEW POWER CIRCUIT AND EMPTY DATA CONDUIT FROM ABOVE CEILING DOWN WALL WITH AND UNDER FLOOR AS REQUIRED TO NEW FLOOR POWER/DATA BOX. DATA CABLING BY OWNER.
- ⑪ COMPLETELY REMOVE EXISTING ABANDONED CEILING FUNCTION LIGHTS AND/OR MODIFY CIRCUIT FOR NEW RECEPTABLES.
- ⑫ REMOVE AND PATCH FLOOR AS REQUIRED AND MODIFY EXISTING POWER CIRCUITS AS REQUIRED AND INSTALL EMPTY DATA CONDUIT UNDER FLOOR TO SERVE NEW DATA PORT AND INSTALLED GFCI RECEPTACLE AND DATA PORT.
- ⑬ COMPLETELY REMOVE EXISTING RECEPTACLE CIRCUIT, AND EXPOSED CONDUIT/RACEWAY BACK TO CLASSROOM TO THE WEST
- ⑭ INSTALL NEW CONDUIT UNDER FLOOR TO NEW DATA PORT. PROVIDED WITH CASEWORK. SEE DWG. A100 FOR CASEWORK CHASE DETAILS. DATA CABLING BY OWNER.

RECORD OF PLANS AND SPECIFICATIONS

PAGE NO. One

NAME OF PROJECT

Brown Co CUSD Lab

PROJECT NO. 5917D DATE BIDS DUE Thursday, May 14, 2020 DEPOSIT \$100.00

TIME AND PLACE OF LETTING

2:00 PM Brown Co CUSD Board Office501 NW Cross St., Mt. Sterling, IL 62353

*** Indicates Potential Bidding Contractor

CONTRACTOR NAME ADDRESS/PHONE/EMAIL	COPY NO.	DATE RECEIVED	DATE RETURNED	DEPOSIT RECEIVED	DEPOSIT RETURNED
Architect	#1				
Owner	#2				
Mac's Ltd. Electrical Contractor 402 Delaware Street Quincy, IL 62301 217 223-8268 Fax: 217 223-0733 macsltd@adams.net	D	4/24/2020			
Brinkman Plumbing Co. 2510 Ellington Rd. Quincy, IL 62301 217 223-1962 Fax: 217 223-1972 janderson@brinkmanplumbing.com	D	4/24/2020			
*** Laverdiere Construction 4055 W. Jackson Macomb, IL 61455 309-837-1258 Fax 309-833-4993 mlynn@lavconinc.com	D	4/27/2020			
*** Trotter General Contracting, Inc 306 E. South Street Industry, IL 61440 309-836-5040 Fax: 309-836-3756 troyleander@icloud.com	D	4/27/2020			
Moore's Floors 2516 W. Schneidman DR Quincy, IL 62305 217 223-9924 Fax: 217 223-9880 m.moore@moorefloors.us	D	4/27/2020			
*** Hein Construction 9130 N Industrial Road Peoria, IL 61615 309-691-4774 309-691-4673 jstaggs@heinconstruction.com	D	4/27/2020			
*** D Joseph Construction 5001 N University St Peoria, IL 61614 309-692-1135 kellyanderson@djoseph.com	D	4/27/2020			
Jansen Electric 4421 N. 60th Street Quincy, IL 62305 217-223-4016 Fax 217-223-8046 jansen@adams.net	#3	4/27/2020			

RECORD OF PLANS AND SPECIFICATIONS

PAGE NO. Two

NAME OF PROJECT

Brown Co CUSD Lab

PROJECT NO.	5917D	DATE BIDS DUE	5/14/20 2:00 PM	DEPOSIT:	\$50.00
CONTRACTOR NAME ADDRESS/PHONE/EMAIL	COPY NO.	DATE RECEIVED	DATE RETURNED	DEPOSIT RECEIVED	DEPOSIT RETURNED
A.H. Kemner & Sons P.O.Box 16 Quincy, IL 62301 217 222-1559 Fax: 217 222-0131 paul@kemnerpainting.com	D	4/27/2020			
Mid-States Door & Hardware 201 Broadway Quincy, IL 62301 217 222-0558 Fax: 217 222-0579 lonnieh@nichelmann.us	D	4/27/2020			
***Eric Green Construction 7230 Woodland Hill Cir Quincy, IL 62305 217-430-4490 eg_construction@yahoo.com	D	4/28/2020			
Breckenkamp Painting 3820 Stonegate Rd. Quincy, IL 62305 217-242-8610 Fax: 217-223-6293 michaelbreckenkamp@yahoo.com	D	4/28/2020			
Royalty Electric 215 S 4th Quincy, IL 62301 217-222-2027 Fax 217-222-2096 royalty1@adams.net	#4	4/28/2020			
***Peoria Metro Const 1925 Darst St Peoria, Illinois 61607 309-671-1466 Fax: 309-671-1426 jvenovich@peoriametro.com	D	4/28/2020			
Building Systems of Illinois 1625 Huston Dr Decatur, IL 62526 217-876-9500 brian@bsi-gc.com	D	4/30/2020			
Carrol Seating 112 Weldon Parkway Maryland Heights, MO 63043 314-227-0088 Fax: 636-778-3449 EScheer@CarrollSeating.com	D	5/1/2020			
Kewaunee Scientific Corp 1220 Iroquois Ave. #200 Naperville, IL 60563 877-572-0244 Fax: 630-942-1720 donjohnson@kewaunee.com	D	5/1/2020			
VWR International, LLC 3021 Gateway Dr. Suite 280 Irving, TX 75063 314 402 8533 charles.bacher@avantorsciences.co	D	5/1/2020			

RECORD OF PLANS AND SPECIFICATIONS

PAGE NO. Two

NAME OF PROJECT

Brown Co CUSD Lab

PROJECT NO. 5917D

DATE BIDS DUE

5/14/20 2:00 PM

DEPOSIT

\$50.00

[illegible]